


# 低漏電品

## Low Leakage Current

項目 Item	特性 Characteristics																					
使用溫度範圍 Operating Temperature Range	- 40 ~ 105°C																					
額定電壓範圍 Rated Working Voltage Range	6.3V ~ 50V DC																					
靜電容量容許差 Capacitance Tolerance (120Hz, 25°C )	±20% (M)																					
洩漏電流 Leakage Current (25°C )	$I \leq 0.02CV + 0.4 (\mu A)$ I : Leakage Current ( $\mu A$ ) C : Rated Capacitance ( $\mu F$ ) V : Working Voltage (V) After 5 minutes applying the DC working Voltage																					
突波電壓 Surge Voltage (25°C )	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>W.V.</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>S.V.</td> <td>8</td> <td>13</td> <td>20</td> <td>32</td> <td>44</td> <td>63</td> </tr> </table>	W.V.	6.3	10	16	25	35	50	S.V.	8	13	20	32	44	63							
W.V.	6.3	10	16	25	35	50																
S.V.	8	13	20	32	44	63																
散逸因素 (Tan. $\theta$ ) Dissipation Factor (120Hz, 25°C )	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>W.V.</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>Tan. <math>\theta</math></td> <td>0.25</td> <td>0.20</td> <td>0.17</td> <td>0.15</td> <td>0.12</td> <td>0.10</td> </tr> </table>	W.V.	6.3	10	16	25	35	50	Tan. $\theta$	0.25	0.20	0.17	0.15	0.12	0.10							
W.V.	6.3	10	16	25	35	50																
Tan. $\theta$	0.25	0.20	0.17	0.15	0.12	0.10																
溫度特性 Temperature Characteristics	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>W.V.</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>-25°C /+25°C</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> </tr> <tr> <td>-40°C /+25</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> </tr> </table> <p>Impedance ratio at 120HZ</p>	W.V.	6.3	10	16	25	35	50	-25°C /+25°C	6	4	3	3	2	2	-40°C /+25	10	8	6	4	3	3
W.V.	6.3	10	16	25	35	50																
-25°C /+25°C	6	4	3	3	2	2																
-40°C /+25	10	8	6	4	3	3																
高溫負荷特性 Load Test	<p>After 2000 hours application of W.V. at +105°C the capacitor shall meet he following limits</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>Capacitance change</td> <td><math>\leq \pm 20\%</math> of initial value</td> </tr> <tr> <td>Tan. <math>\theta</math></td> <td><math>\leq \pm 200\%</math> of initial specified value</td> </tr> <tr> <td>Leakage current</td> <td><math>\leq</math> initial specified value</td> </tr> </table>	Capacitance change	$\leq \pm 20\%$ of initial value	Tan. $\theta$	$\leq \pm 200\%$ of initial specified value	Leakage current	$\leq$ initial specified value															
Capacitance change	$\leq \pm 20\%$ of initial value																					
Tan. $\theta$	$\leq \pm 200\%$ of initial specified value																					
Leakage current	$\leq$ initial specified value																					
放置特性 Shelf Test	<p>After 500 hours application of W.V. at +105°C the capacitor shall meet he following limits</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>Capacitance change</td> <td><math>\leq \pm 20\%</math> of initial value</td> </tr> <tr> <td>Tan. <math>\theta</math></td> <td><math>\leq 200\%</math> of initial specified value</td> </tr> <tr> <td>Leakage current</td> <td><math>\leq 200\%</math> of initial specified value</td> </tr> </table>	Capacitance change	$\leq \pm 20\%$ of initial value	Tan. $\theta$	$\leq 200\%$ of initial specified value	Leakage current	$\leq 200\%$ of initial specified value															
Capacitance change	$\leq \pm 20\%$ of initial value																					
Tan. $\theta$	$\leq 200\%$ of initial specified value																					
Leakage current	$\leq 200\%$ of initial specified value																					

# 尺 寸 圖

## Dimension

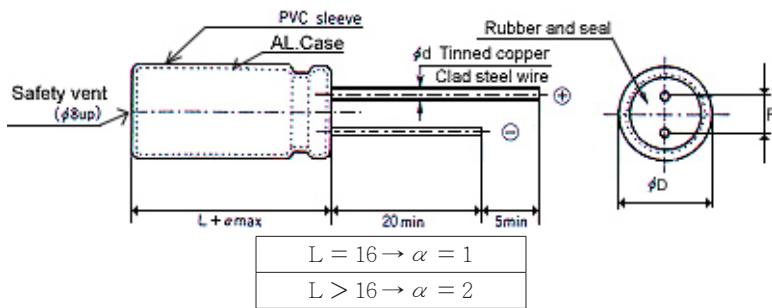

D	5	6	8	10
$F \pm 0.5$	2	2.5	3.5	5
$d \pm 0.02$	0.5	0.5	0.5	0.6

$\mu F$	WV	10	16	25	35	D x L (m/m)		
0.1						5*11	1	
0.22		尺寸 Dimension : $\phi D \times L$ (mm)				5*11	4	
0.33		紋波電流 Ripple Current : mA (rms) at 120Hz 105°C				5*11	4	
0.47						5*11	6	
1						5*11	17	
2.2						5*11	29	
3.3						5*11	34	
4.7						5*11	43	
10				5*11	60	5*11	67	6*11 78
22			5*11	67	5*11	80	5*11	92 6*12 121
33	5*11	65	5*11	90	5*11	97	6*11	132 8*12 148
47	5*11	74	5*11	116	6*11	134	8*12	158 8*12 206
100	6*11	170	6*12	241	8*12	263	8*14	295 10*17 371
220	8*12	281	8*12	309				